

M-L7-3 7x3W LED PAR LIGHT

USER'S MANUAL

Thanks for your choosing our product, please carefully read this manual and operate it obey the specification in order to make sure you can correct and safety installing, operating and maintaining it.

I. Technical Parameters

Voltage: AC90-240V

Frequency: 50/60HZ

Power: 30W

Lamp: 7pcs*3W RGB 3 IN 1 LEDs


Controller Model: Auto, Sound Activate, DMX512 and Master-slave

Packing Size: 780 *440 *260mm(10pcs)

Net Weight: 1.1KG, Gross Weight: 1.5KG

II. Menu Operation Instructions:

Press “Menu” button to Set, to confirm by press “ENTER” button。 correct by pressing “UP&DOWN” button.

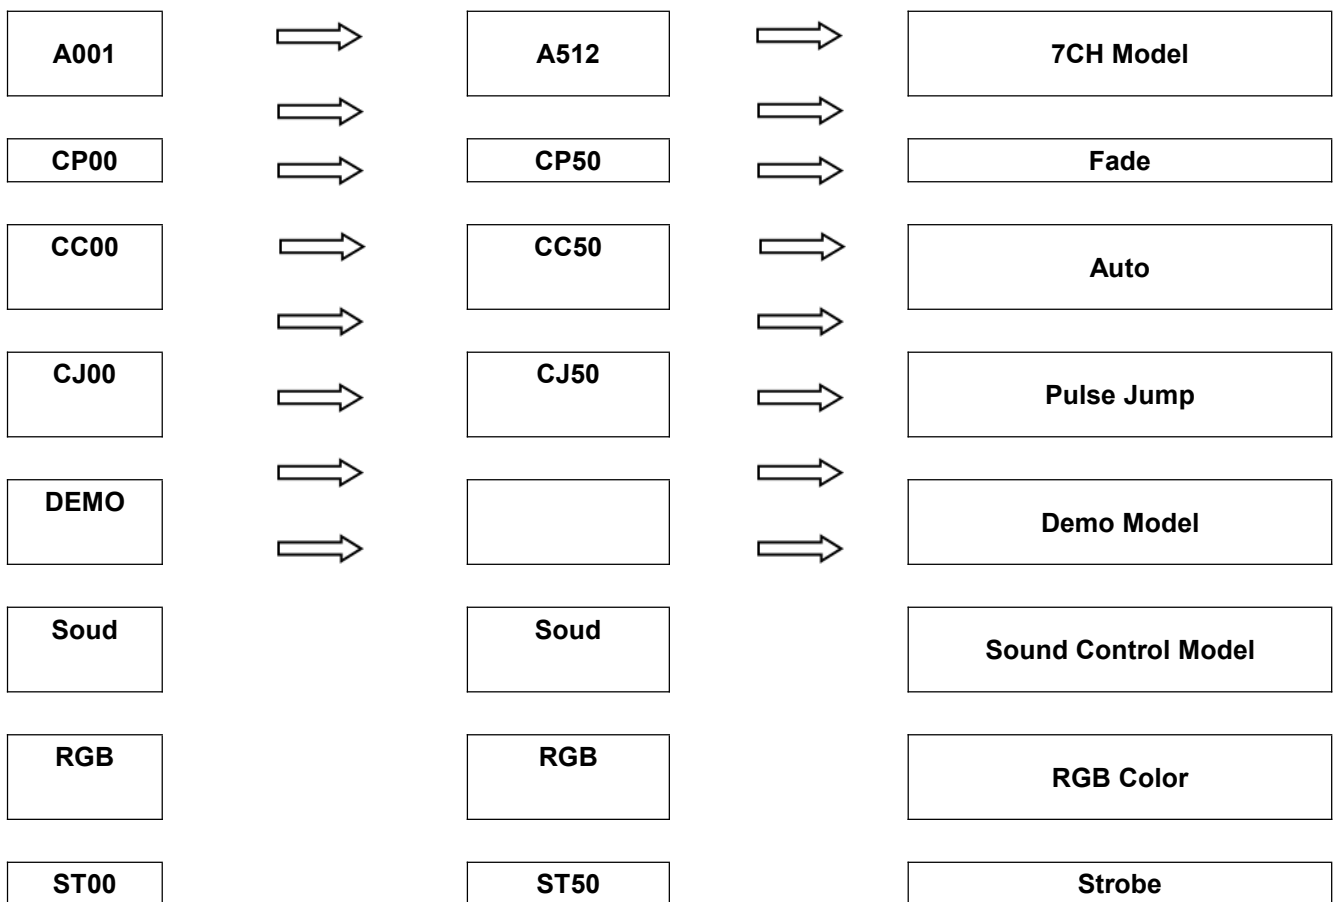

III: DMX Channel Operations:

Channel	DMX Value	Function
CH1	0-255	Dimming RGBW. From darkness to brightness
CH2	0-255	Dimming Red. From darkness to brightness
CH3	0-255	Dimming Green. From darkness to brightness
CH4	0-255	Dimming Blue. From darkness to brightness
CH5	0-50	Strobe and dimming

	51-99	G,B Color
	100-149	Auto
	150-199	Fade
	200-249	Pulse Jump
	250-255	Sound Control
CH6	1-255	Work On CH5
CH7	1-255	Strobe, Speed from slow to fast

HD AUDIO SYSTEM INC.

ADDRESS : 2112 Lee Ave. South El Monte, CA 91733

TELEPHONE : +1 (626) 433-0357 +1 (844) 223-7809

FAX : +1 (626) 433-0315

EMAIL : info@hdaudiosystem.com